


NOTE:- Serving height for children up to 12 years of age. This model is available with a work top height of 800mm and a Trayslide height of 773mm. Please add "B" to the end of the product code.

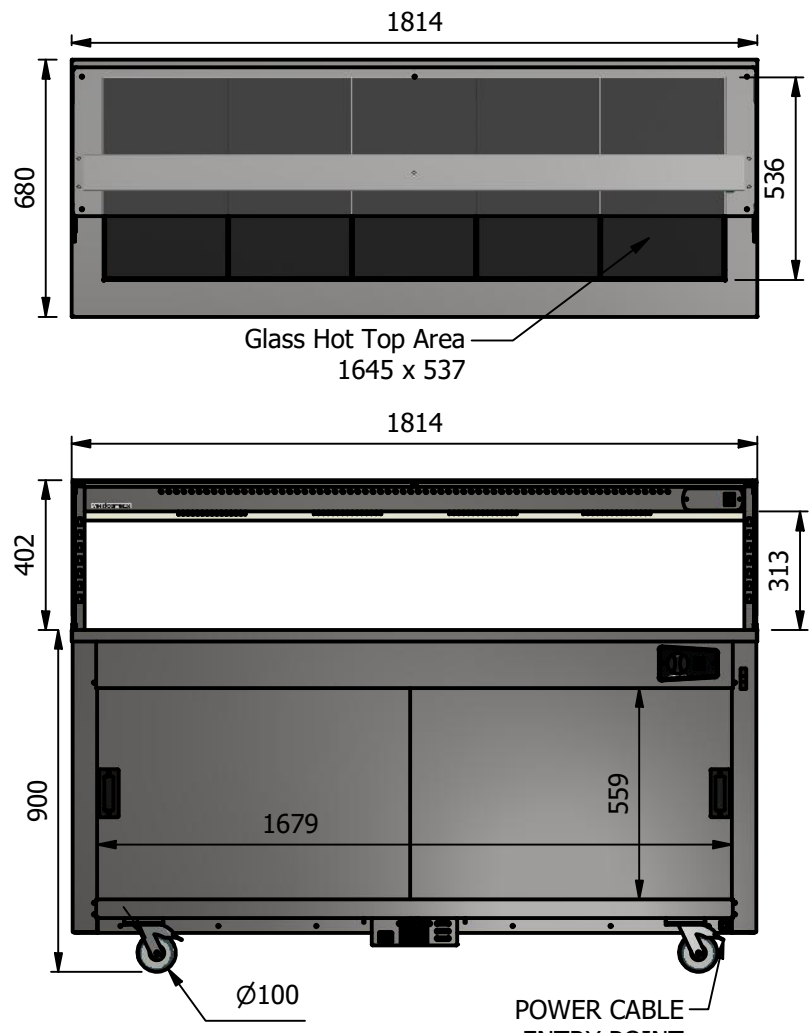

Specification

Neo-Ceram glass hot Top
 The Stainless steel top inset with Neo Ceram glass panels provides a clean hot serving area.

Dry Heat
 Fan Assisted Hotcupboard

Dimensions
 Width - 1814mm
 Depth - 680mm
 Height - 900mm
 Weight - 137kg



Sahara Fan Model SF309

Area of hot top
 1645mm x 537mm

Capacity of Hot Cupboard [usable inside space]
 Width - 1679mm
 Depth - 555mm
 Usable Height Bottom shelf - 204mm
 Usable Height Top Shelf - 245mm

60 covers & meals
 [10" plated meals stacked using plate covers]
 or
 228 off 10" plates stacked for heating
 or
 10 off 1/1GN pans side by side
 150mm deep 5 on top 5 on bottom

Power Rating
 1.80kw with no gantry, 2.68Kw with heated gantry.
 complete with a 2m long cord set & 15 amp plug
 Removable Fan heating System Sahara Fan Model SF309

Materials
 1.2mm 304 Grade St/ Steel Top & Supports
 0.7mm 430 Grade St/ Steel Internal Structure
 GN 1/1 Grid Shelves with 30mm x 30mm tube supports

Installation
 All swivel castors, two braked

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED) ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	VERSICARTE			Product No	N/A		
Description	*** VC5HTSL *** Square Glass Options						
Material/Finish	Thickness			Desp/Date			
Legacy P/N	Weight	137kg		Quote No.			
Client				SO Number	STANDARD		
Client Project				Approved By			

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.



Dwg No.	VCP-065981	Issue	
Drawn By	ABB		
Date	28/10/2019		
Scale	1 : 20	Sheet	1 / 2 A4