

# Koala 160 AS



Castors Kit available on request →

## Refrigerated container for the transport of chilled and frozen products at a controlled temperature

- Available in versions:
  - AS: temperature adjustment range: from -25°C to +10°C;
  - ASH: with heating kit and temperature adjustment range: from -25°C to +40°.
- Ideal for transporting large quantities.
- The insulation provided by the walls of the container (particularly thick in this model), guarantees the maintenance of the temperature with a minimum number of ignitions of the refrigeration unit and this contributes to limit energy consumption.
- Cooling unit is triggered when external temperature is higher than the temperature set with the programmable digital thermostat. This allows to maintain a constant temperature even in case of very high external temperatures.
- In the ASH versions, the heating unit is triggered when external temperature is lower than the temperature set with the programmable digital thermostat. This allows to maintain a constant temperature even in case of very low external temperatures.
- Total compliance with the cold chain at all stages of transport.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Equipped with a low consumption cooling unit.
- Dual power source: during transport can be connected to the battery (or auxiliary battery) of the vehicle and, at the destination, can be connected to mains power.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.


### MANUFACTURING MATERIALS

<b>Polyethylene</b>	inner and outer walls of the container and lid; suitable for food contact	<b>Polyurethane</b>	insulating material between the walls of the container and of the lid; free of CFC and HCFC
<b>Silicone</b>	gasket	<b>Polyamide and fiberglass</b>	hinges
<b>Aluminum</b>	colling unit frame, control panel	<b>Stainless steel</b>	grip handles

## TECHNICAL CHARACTERISTICS

<p><b>AS version</b></p>	<ul style="list-style-type: none"> <li>• from 0°C to +10°C</li> <li>• from -18°C to +10°C</li> <li>• from -25°C to +10°C</li> </ul>	<p><b>Versione ASH</b></p>	<ul style="list-style-type: none"> <li>• from 0°C to +40°C</li> <li>• from -18°C to +40°C</li> <li>• from -25°C to +40°C</li> </ul>
	<p>Equipped with two cables:</p> <ul style="list-style-type: none"> <li>• for power supply to <b>230Vac</b> 50-60Hz.</li> </ul>		<ul style="list-style-type: none"> <li>• for feeding to <b>12Vdc</b> (with cigarette lighter socket).</li> </ul>
<p><b>+/- 0,5 °C</b></p>	<p>Degree of accuracy in temperature adjustment:</p> <ul style="list-style-type: none"> <li>• <b>+/-0,5 °C.</b></li> </ul>		<p>Protection against voltage drops of the vehicle battery, in case of falling below of the limit value of <b>11V.</b></p>
	<p>Cooling unit performance guaranteed for use at ambient temperature:</p> <ul style="list-style-type: none"> <li>• <b>from +10°C to +30°C.</b></li> </ul>		<p>Container (insulated case) guaranteed for use:</p> <ul style="list-style-type: none"> <li>• <b>from -30° to +100°C.</b></li> </ul>
<p><b>GAS</b></p>	<p>Coolant gas: <b>R134a</b></p>		<p>Hermetic compressor with electronic control unit for adjustment and control equipped with overvoltage protections.</p>
	<p>Adjustment and control of the temperature with programmable digital thermostat.</p>		<p>Cooling unit equipped with a "roll-bond" static evaporator.</p>
	<p>Seal of the lid can be removed easily.</p>		<p>Integrated stainless steel handles.</p>
	<p>Hinge integrated in the container.</p>		<p>Melform closing hook in shockproof material.</p>
	<p>Evaporator protection internal grid made of plasticised metal wire.</p>		<p>Mono-block structure, no sharp edges, joints and welds.</p>
	<p>Insulated with CFC and HCFC-free polyurethane foam.</p>		<p>Available (on request) USB datalogger to record temperature data during transport.</p>
	<p>Wheels kit available on request (2 fixed castors and 2 swivel castors with brake d.125mm; rubber tread, polyamide core, galvanized steel support).</p>		

## TECHNICAL SPECIFICATIONS

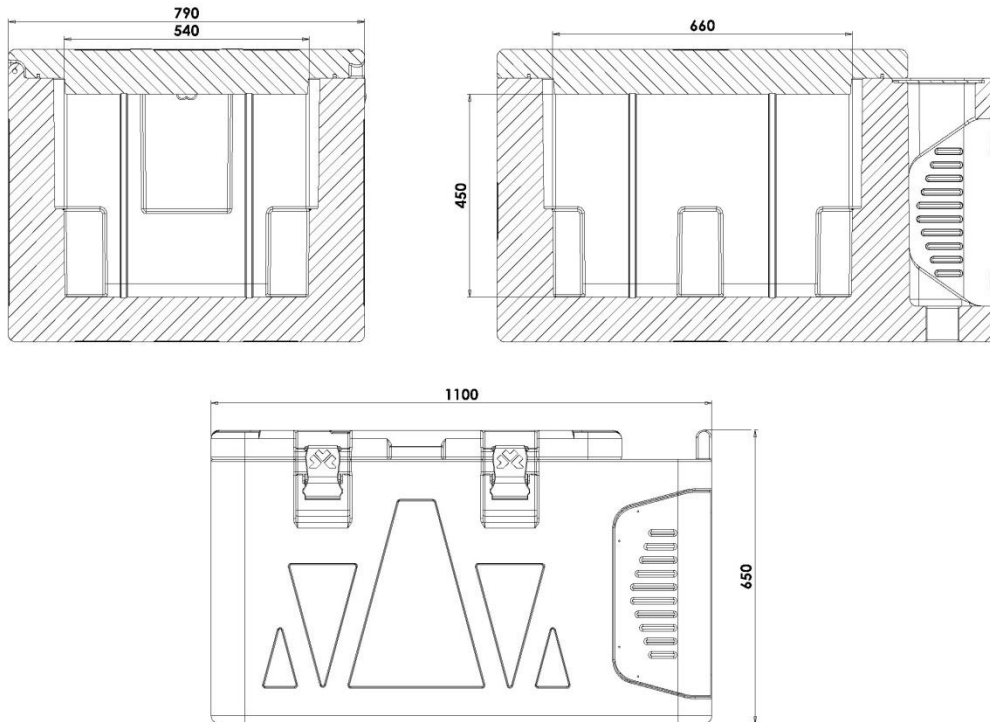

Model	Code	12V Power supply	24V Power supply	Nominal absorption	Fuses	
<b>AS VERSION</b>						
Koala 160 AS from 0°C to +10°C	39AB6028	✓		<b>0,62A</b> to 230Vac <b>12A</b> to 12Vdc	<b>4A</b> for 230Vac <b>25A</b> for 12Vdc	
Koala 160 AS from -18°C to +10°C	39AB6031	✓		<b>0,62A</b> to 230Vac <b>12A</b> to 12Vdc	<b>4A</b> for 230Vac <b>25A</b> for 12Vdc	
Koala 160 AS from -25°C to +10°C	39AB6035	✓		<b>0,62A</b> to 230Vac <b>12A</b> to 12Vdc	<b>4A</b> for 230Vac <b>25A</b> for 12Vdc	
<b>ASH VERSION (with heating kit)</b>						
Koala 160 ASH from 0°C to +40°C	39AB6029	✓		<b>0,62A</b> to 230Vac <b>12A</b> to 12Vdc	<b>4A</b> for 230Vac <b>25A</b> for 12Vdc	
Koala 160 ASH from -18°C to +40°C	39AB6033	✓		<b>0,62A</b> to 230Vac <b>12A</b> to 12Vdc	<b>4A</b> for 230Vac <b>25A</b> for 12Vdc	
Koala 160 ASH from -25°C to +40°C	39AB6025	✓		<b>0,62A</b> to 230Vac <b>12A</b> to 12Vdc	<b>4A</b> for 230Vac <b>25A</b> for 12Vdc	
Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Koala 160 AS/ASH		melange grey blue	790x1100xh650	540x660xh450	162	59
<b>ACCESSORIES</b>						
Castors kit	RRI070		diam. 125mm			